



## SIZE REFERENCE CHART



## ACETYLENE CYLINDERS

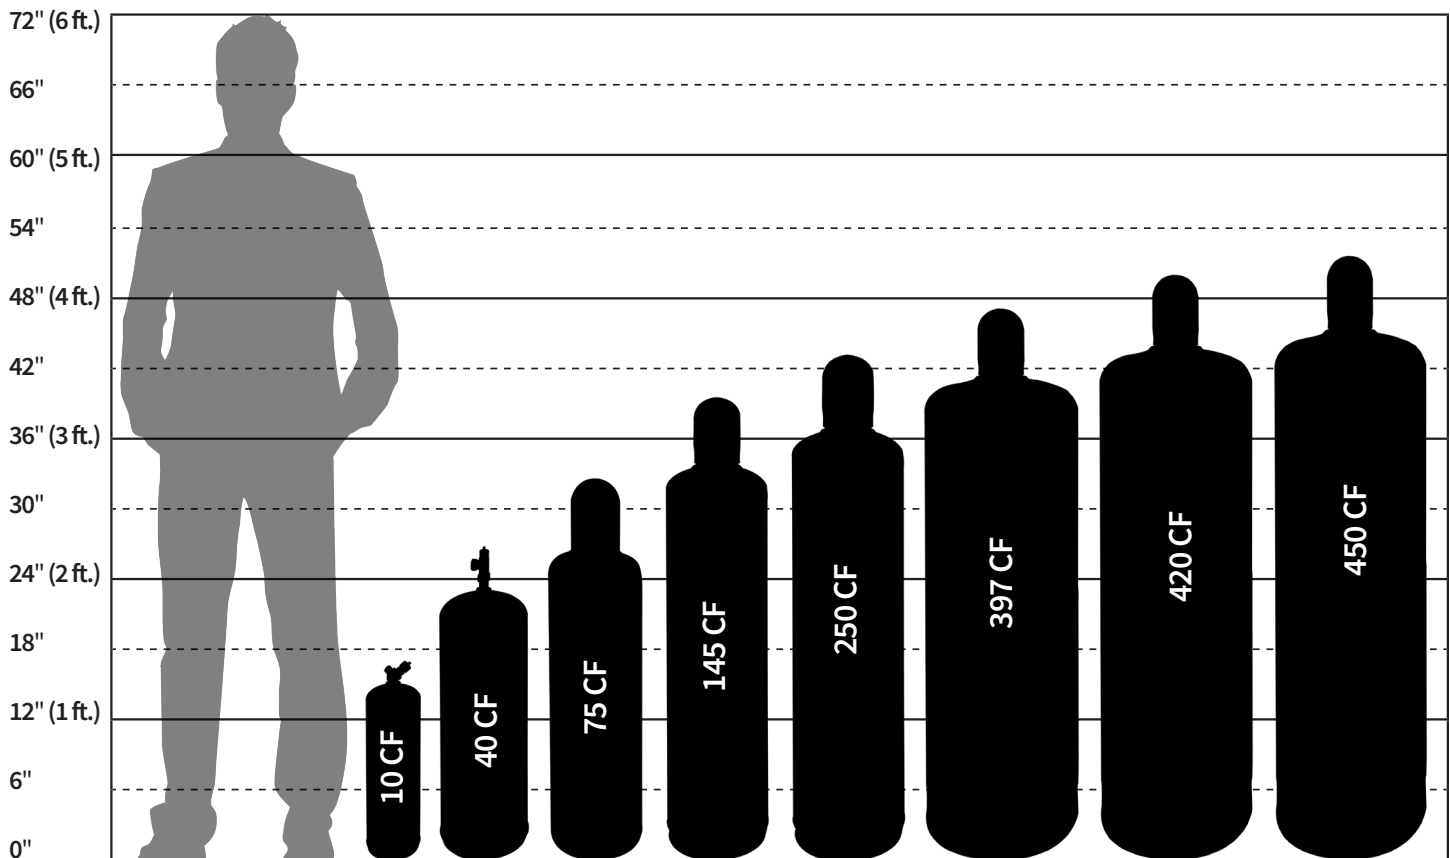

MODEL	Service Pressure		Diameter		Height (with Cap)		Tare Weight (without Cap**)	
	psig	bar	in.	mm	in.	mm	lb.	kg
10 CF (MC)	250	17.2	3.8	96.5	15.4	390	7.7	3.5
40 CF (B - Standard)	250	17.2	6.0	152.4	23.2	589	25.2	11.4
40 CF (B - Big Flange)*	250	17.2	6.0	152.4	25.8	655	27.9	12.7
75 CF	250	17.2	7.0	177.8	31.3	795	43.8	19.9
145 CF	250	17.2	8.0	203.2	39.5	1,003	72.0	32.7
250 CF	250	17.2	10.0	254.0	43.3	1,100	117.5	53.3
397 CF	250	17.2	12.3	312.4	46.6	1,184	170.0	77.1
420 CF	250	17.2	12.3	312.4	48.9	1,242	177.0	80.2
450 CF	250	17.2	12.3	312.4	50.9	1,293	185.0	84.0

\*All cylinders are DOT-8AL/TC-8WAM – except 40 CF (B - Big Flange) is DOT-8AL only. \*\* Cap weight = add 2 lb. (.9 kg).